


LR3500 | SLIDING SYSTEM

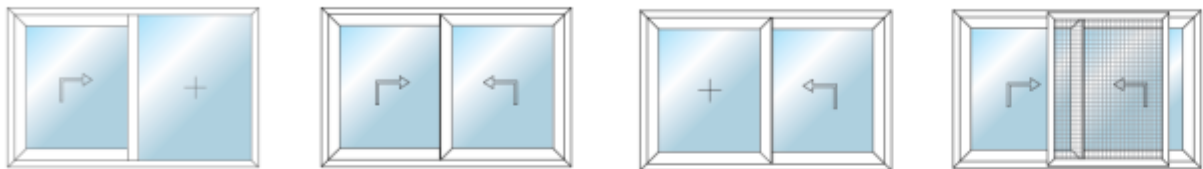



CHARACTERISTICS THAT REFLECT THE IDENTITY OF THE PRODUCT

- Improved, water resistance air insulation and energy saving
- Production and installation made easy
- The HBSB mechanism has a 250 kg sash carriage with a lift and slide system
- Suitable for any project, with custom design options available
- With stainless steel rails and special bearings the rail movement is significantly improved
- Modern and aesthetic appearance of metal with silver bronze colored anodized surfaces
- Unique concepts and designs utilizing powder coating and wood effects

TECHNICAL SPECIFICATIONS


SASH WIDTH	: 57 mm
SASH LENGTH	: 92.5 mm
FRAME LENGTH	: 45 mm
GLASS THICKNESS	: 20 - 45 mm
MAX. SASH LOAD CAPACITY	: 200 kg, 300-400 kg.
INSULATION BRIDGE	: 24 mm

AVAILABLE FINISHES

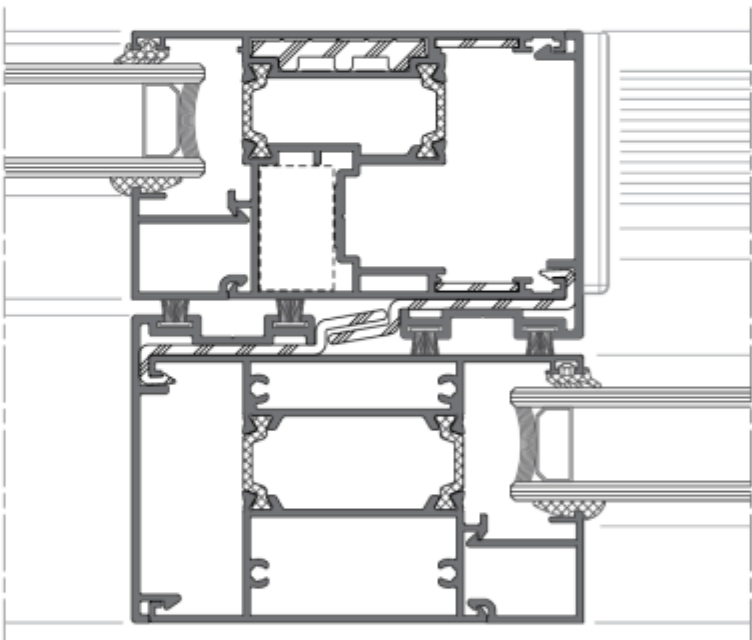

250 Kg.
Capacity

Lift & Slide

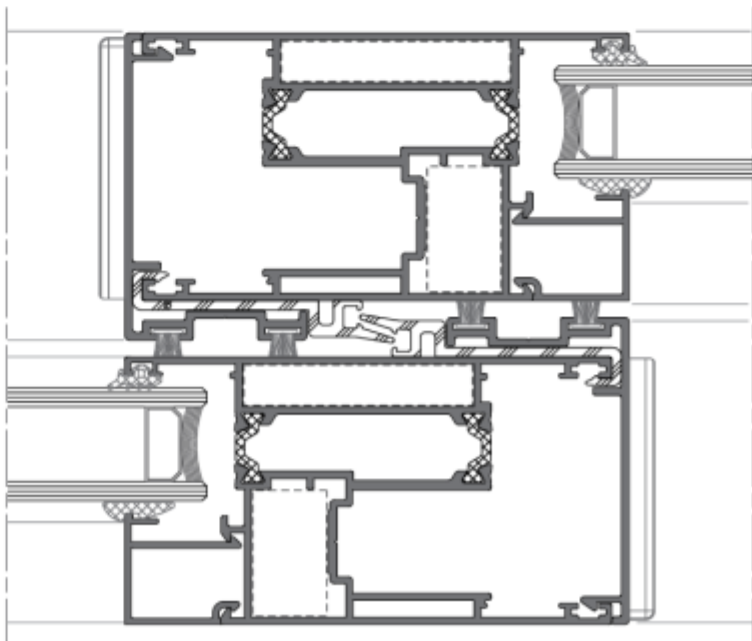

300-400 Kg.
Capacity

Lift & Slide

