


LR5100 | OPENING SYSTEM

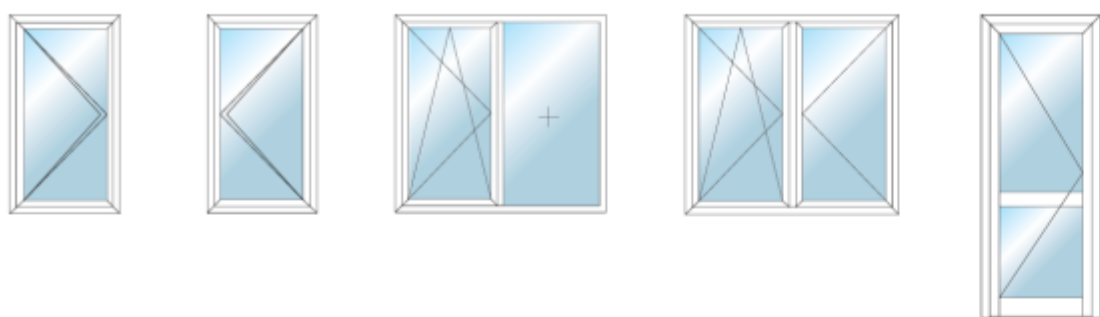

CHARACTERISTICS THAT REFLECT THE IDENTITY OF THE PRODUCT

- Optimum solutions with wide profile options
- Ability to apply PVC double opening system with standard aluminum double opening system
- Excellent sealing and sound insulation as a result of a combination of casing middle seals and radiant heat insulation barrier
- Specially designed adjustable locking counterparts
- Possibility of better thermal insulation values with different combinations
- Possibility of applying triple glazing and blind glass
- Modern and aesthetic appearance of metal with silver bronze colored anodized surfaces
- Unique concepts and designs utilizing powder coating and wood effects

TECHNICAL SPECIFICATIONS

SASH WIDTH	: 72 mm
FRAME WIDTH	: 72 mm
FRAME SASH LENGTH (MIN.)	: 90 mm
GLASS THICKNESS	: 16 - 42 mm
MAX. SASH LOAD CAPACITY	: 120 - 200 kg.
INSULATION BRIDGE	: 24 mm
THERMAL INSULATION	: Uf: 2.3 W/m2K

AVAILABLE FINISHES

